


STOCK NO. 19235-A200
KELLER EZ-SADDLE

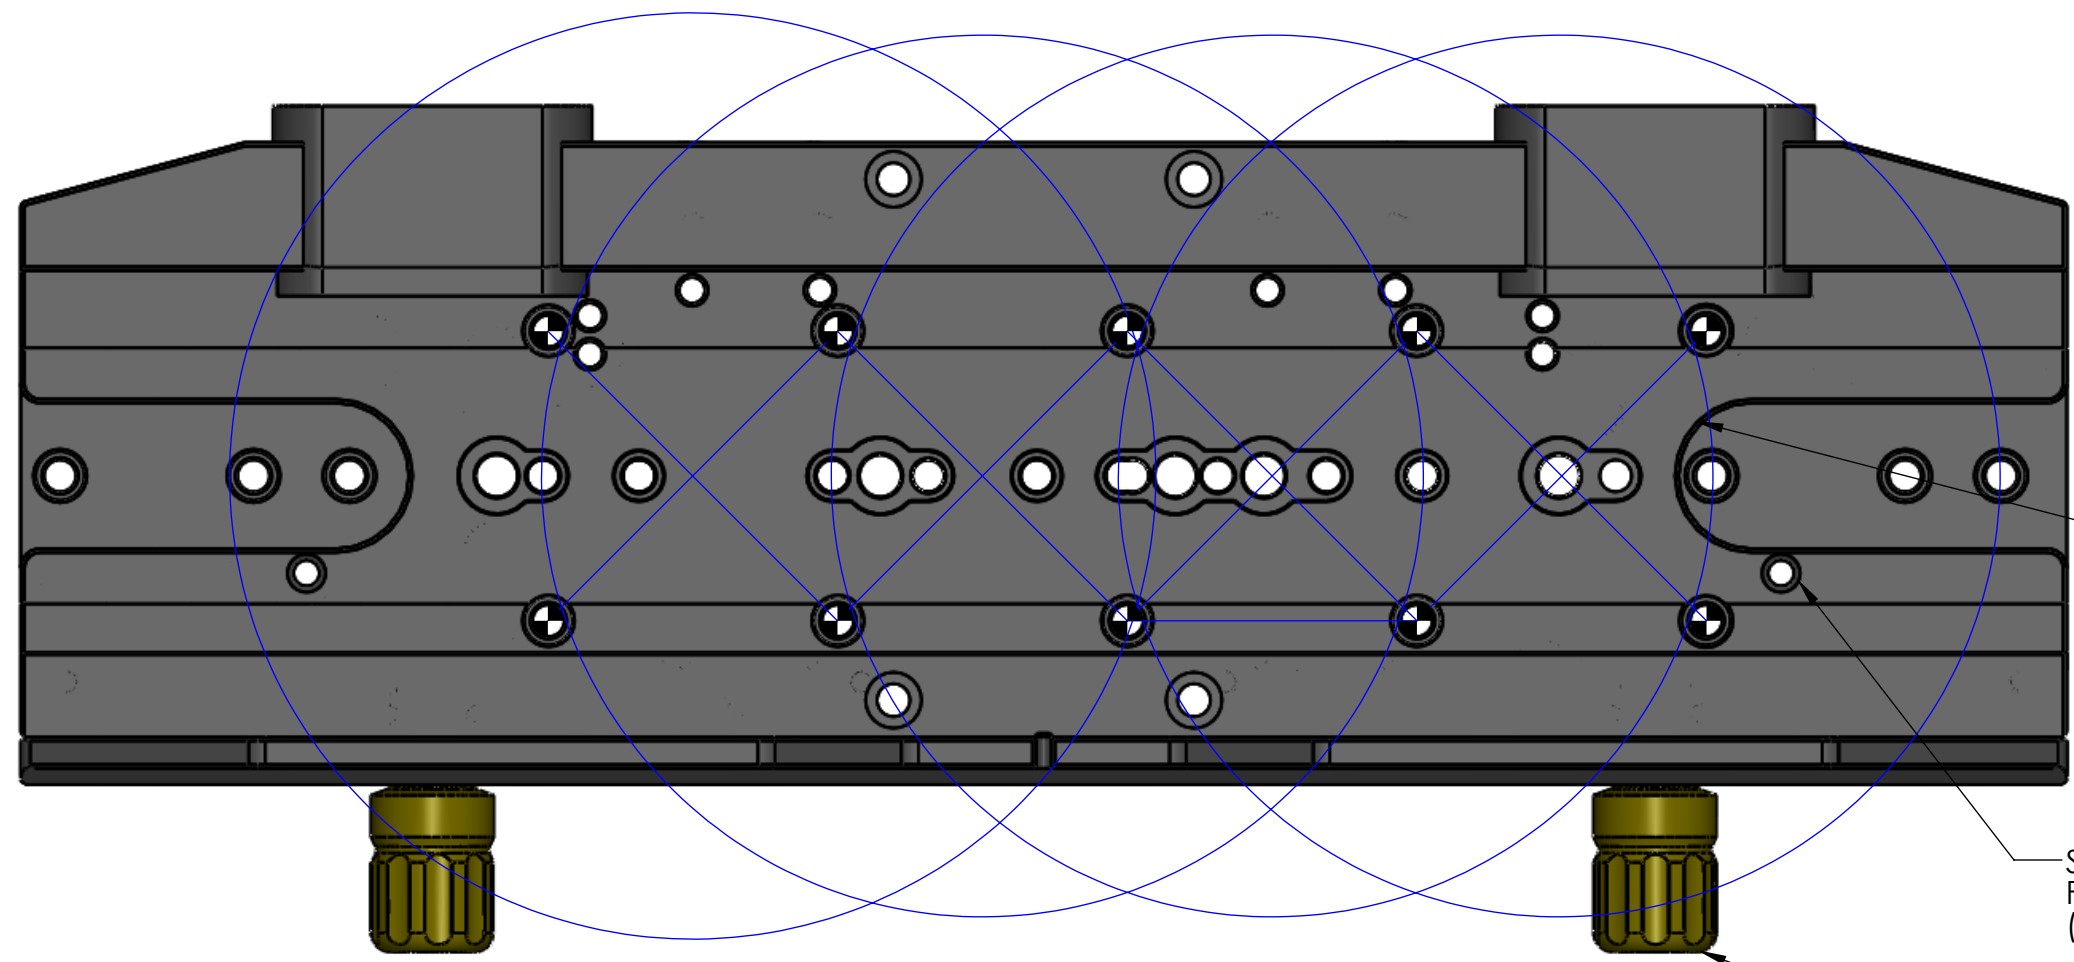

NOTCH FOR D PLATE
1/4-20 SAFETY BOLT

SAFETY 1/4-20 CAP SCREW
FOR SHORTER DOVETAIL BARS
(REMOVE FOR LONGER BARS)


KNOBS ON OPPOSITE
SIDE OF CLAMPS FOR
STABLE LOADING AND
UNLOADING


PLANEWAVE ASCENSION 200 AND 200HR MOUNT
FOUR 4-HOLE LOCATIONS AVAILABLE

BOLT KIT INCLUDES:
FOUR (4) 1/4"-20 X 1" SHCS
TWO (2) CLEAT STYLE MOUNTS

TOOL KIT INCLUDES:
3/16" HEX KEY (to fit 1/4"-20 Socket Bolts)
1/8" HEX KEY (to fit 10-32 Button Screws)

| | | | | |
|--|------------|----------|--------------|------------------------|
| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ±.007 THREE PLACE DECIMAL ±.003 | DRAWN | NAME | DATE | Optec Inc. |
| | CHECKED | JD | 09/25/2010 | |
| | ENG APPR. | | | |
| | MFG APPR. | | | |
| MATERIAL | CONTRACT | | | TITLE: |
| FINISH | EZ-SADDLE | | | KELLER EZ-SADDLE NOTES |
| DO NOT SCALE DRAWING | SIZE | DWG. NO. | | |
| | B | | | |
| | SCALE: 2:3 | WEIGHT: | SHEET 1 OF 2 | |



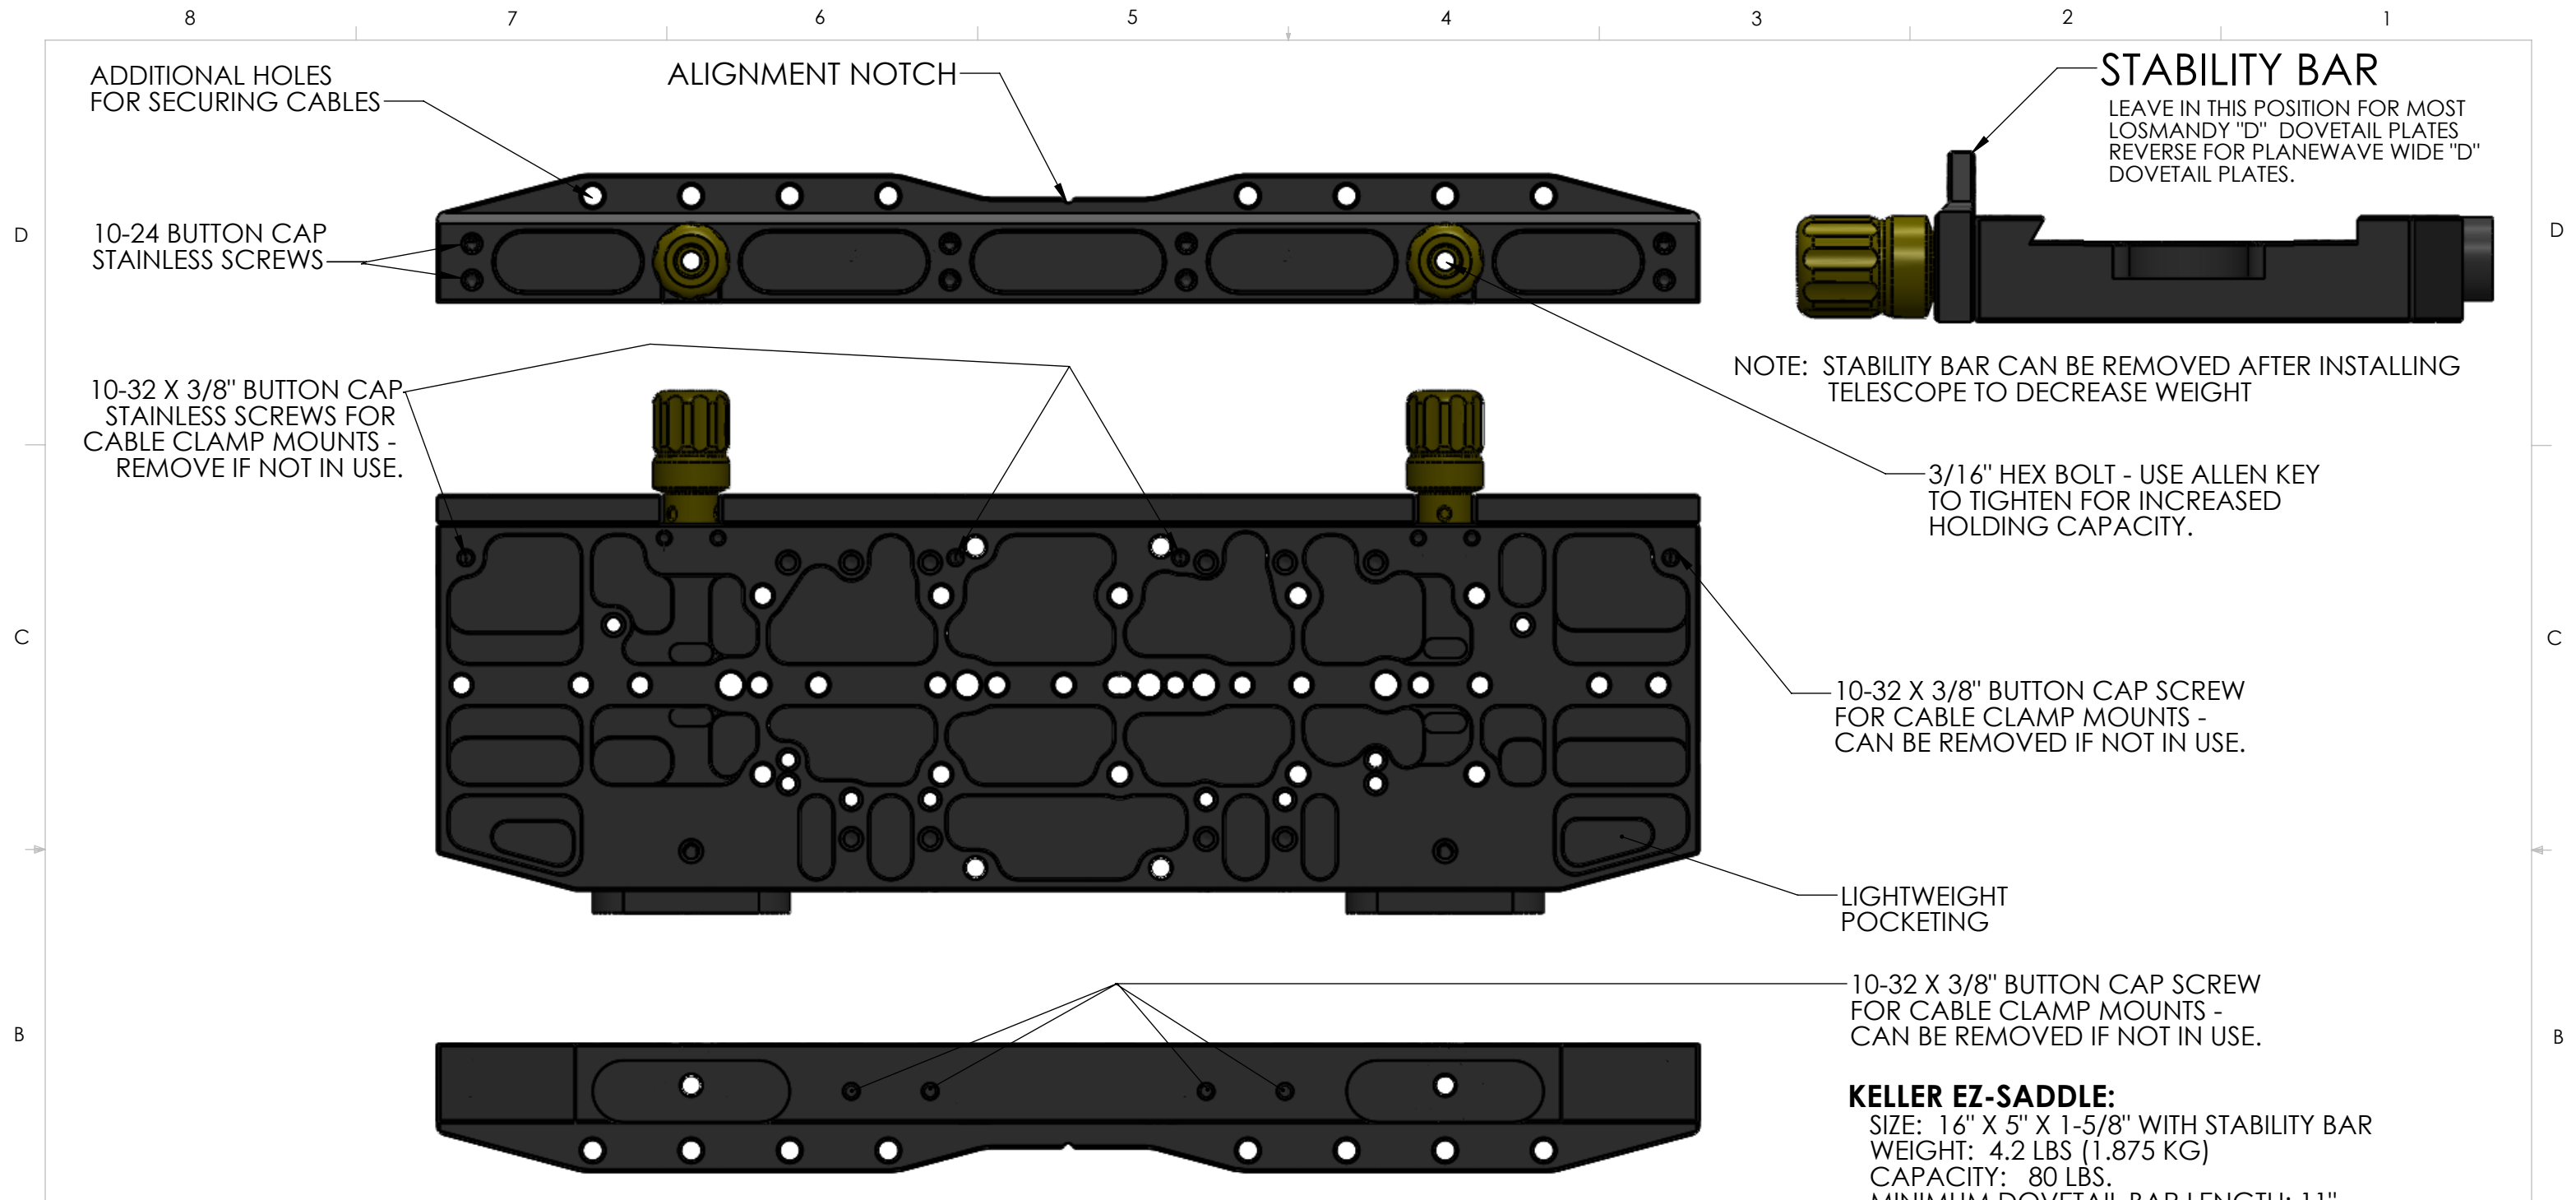

Updated: 2011/02/11

| | | | | |
|---|------------|-----------|----------|------------------------|
| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ±.007 THREE PLACE DECIMAL ±.003 | DRAWN | NAME | DATE | Optec Inc. |
| | CHECKED | JD | 9/25/10 | |
| | ENG APPR. | | | |
| | MFG APPR. | | | |
| | Q.A. | | | |
| THIRD ANGLE PROJECTION | MATERIAL | CONTRACT | | TITLE: |
| | 6061-T6 | EZ-SADDLE | | KELLER EZ-SADDLE NOTES |
| FINISH FROSTKOTE BRIGHT DIP BLACK | SIZE | | DWG. NO. | |
| DO NOT SCALE DRAWING | SCALE: 1:2 | | WEIGHT: | SHEET 2 OF 2 |