


STOCK NO. 19235-ME-VSP
KELLER EZ-SADDLE

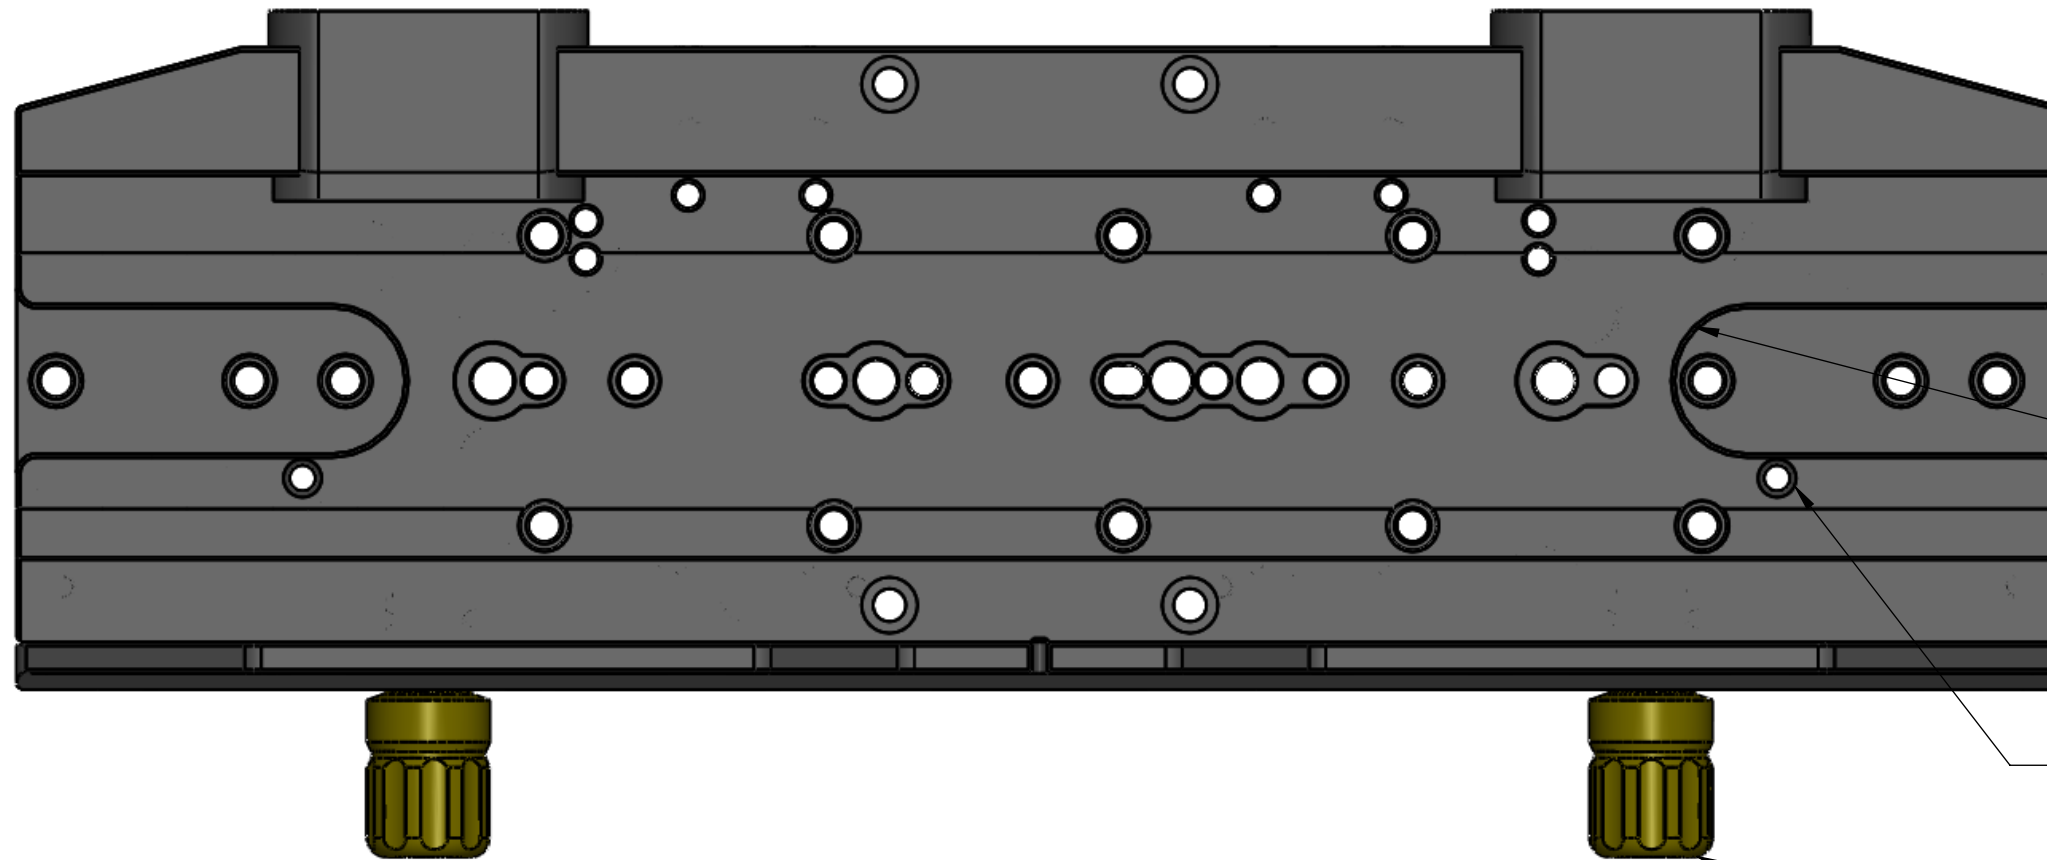


NOTCH FOR D PLATE
1/4-20 SAFETY BOLT


SAFETY 1/4-20 CAP SCREW
FOR SHORTER DOVETAIL BARS

KNOBS ON OPPOSITE
SIDE OF CLAMPS FOR
STABLE LOADING AND
UNLOADING

PARAMOUNT ME VERSAPLATE TANDEM OPTION
TWO 4-BOLT LOCATIONS AVAILABLE
ON BOTTOM SIDE.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ±.007 THREE PLACE DECIMAL ±.003	DRAWN	NAME	DATE	Optec Inc.
	CHECKED	JD	09/25/2010	
	ENG APPR.			
	MFG APPR.			
	Q.A.			
MATERIAL	CONTRACT			TITLE:
6061-T6	EZ-SADDLE			KELLER EZ-SADDLE NOTES
FINISH				SIZE DWG. NO.
SEE NOTES				B
DO NOT SCALE DRAWING				SCALE: 2:3 WEIGHT: SHEET 1 OF 2



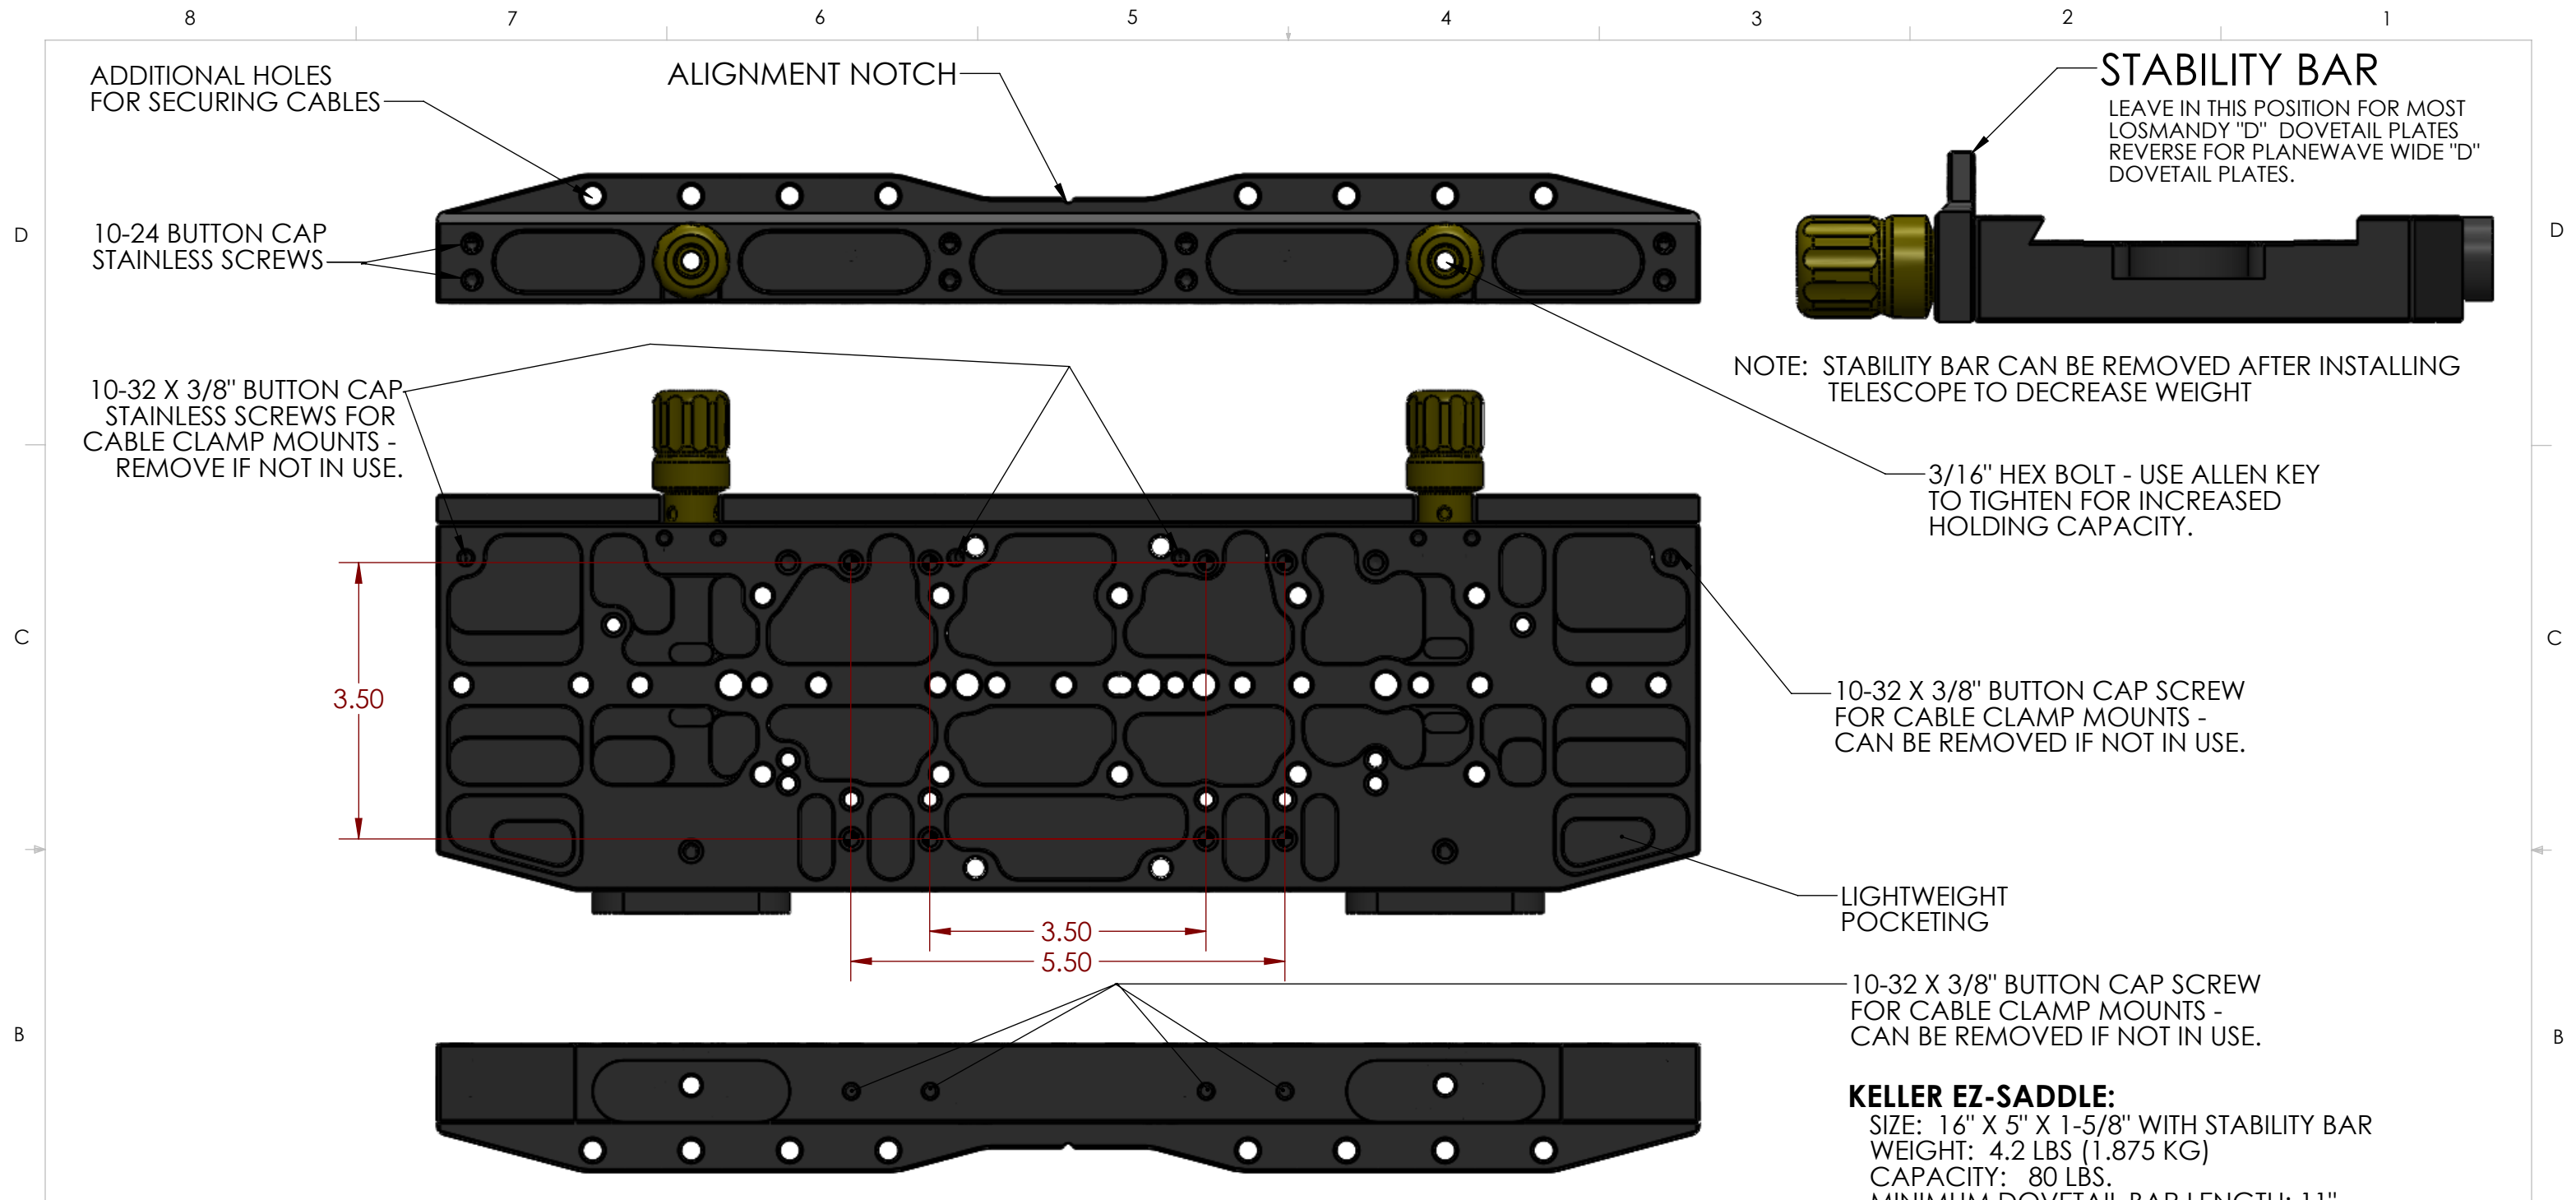


PARAMOUNT ME VERSAPLATE TANDEM OPTION
TWO 4-HOLE LOCATIONS AVAILABLE
THREADED FOR 1/4"-20 BOLTS

BOLT KIT INCLUDES:
FOUR (4) 1/4"-20 X 1-1/8" SHCS
(FOR VERSAPLATE THROUGH HOLES)

KELLER EZ-SADDLE:
 SIZE: 16" X 5" X 1-5/8" WITH STABILITY BAR
 WEIGHT: 4.2 LBS (1.875 KG)
 CAPACITY: 80 LBS.
 MINIMUM DOVETAIL BAR LENGTH: 11"

Updated: 2011/02/11



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ±.007 THREE PLACE DECIMAL ±.003	DRAWN	NAME	DATE	Optec Inc.
	CHECKED	JD	9/25/10	
	ENG APPR.			
	MFG APPR.			
	Q.A.			
MATERIAL	6061-T6			TITLE:
FINISH	FROSTKOTE BRIGHT DIP BLACK			KELLER EZ-SADDLE NOTES
DO NOT SCALE DRAWING	CONTRACT			SIZE DWG. NO.
	EZ-SADDLE			B
	SCALE: 1:2	WEIGHT:	SHEET 2 OF 2	